INTERNOVA
PROFESSIONAL LIGHTING

PRODUCT DATASHEET




ORIZZONTE • BLACK

ORIZZONTE
SURFACE MOUNTED LIGHTING

made in HOLLAND

AVAILABLE IN






Lumen output	1100lm • 2000lm • 3000lm
CRI	>80Ra
CCT	3000K • 4000K

FIXTURE SPECIFICATIONS

View product on website

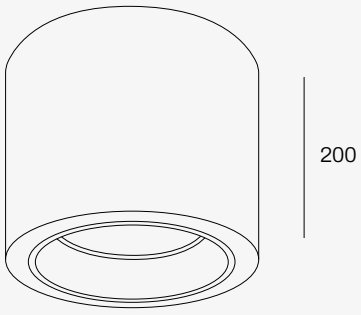

Fixture weight: 1352 grams

Housing material	Die cast aluminium
Material finish	Powder coating
RAL colour	9004 (Black) • 9003 (White)
Fixture type	Surface mounted Light
LED Module	Philips Fortimo DLM LED
Driver	Philips Xitanium LED driver
Number of light sources	1
Adjustability	Fixed
IP rating	IP20
Expected lifetime	L70 / B80 @ 60.000 hours
Photobiological safety	RG1 Unlimited
Power factor	> 0.9
Colour consistency	3 SDCM
Warranty	5 years on LED module and driver

© 2025 INTERNOVA PROFESSIONAL LIGHTING BV

INTERNOVA
PROFESSIONAL LIGHTING

FIXTURE VARIATIONS

LED module	Lumen	Light colour	Efficiency (Lm/W)	Power	Dim options
Philips Fortimo DLM G2	1100lm	830 / 840	90 / 98	12.1W	Triac / DALI / Casambi
Philips Fortimo DLM G2	2000lm	830 / 840	88 / 96	22.3W	Triac / DALI / Casambi
Philips Fortimo DLM G2	3000lm	830	91	32.2W	Triac / DALI / Casambi
Philips Fortimo DLM G2	3000lm	840	100	30.0W	Triac / DALI / Casambi

Fixture variations:
[1]) Lumen output of LED module (COB) is displayed as net lumen and is subject to 10% tolerance of real time light output (set by international standards)
[2]) Colour temperature notation is composed of CRI value, indicated by the first digit, and CCT in Kelvin, indicated by the following 2 digits. Accuracy of the Correlated Colour Temperature (CCT) is subject to a tolerence of up to +/- 150 Kelvin compared to nominal value.
[3]) Fixture efficiency is displayed in lumens per watt and is calculated based on the net lumen output and power consumption of both the LED module and driver.
[4]) Mentioned wattage applies for the total power consumption of the fixture, including both LED module and driver.

Technical data can be changed by Internova Professional Lighting BV without prior notice.

ARTICLE CODE CONFIGURATOR

IN 39 [ ] [ ] [ ] [ ]

Clear filters

LUMEN OUTPUT
- 1100lm
- 2000lm
- 3000lm

LIGHT COLOUR
- 3000K
- 4000K

REFLECTOR
- 70°

FIXTURE COLOUR
- Black
- White


DIM OPTIONS
- On/off
- Triac dim
- DALI dim
- Casambi

Article code configurator:
[1]) This configurator may not be compatible with all PDF readers. For an optimal experience, please open this document using Google Chrome

© 2025 INTERNOVA PROFESSIONAL LIGHTING BV

INTERNOVA
PROFESSIONAL LIGHTING

POLAR DIAGRAMS

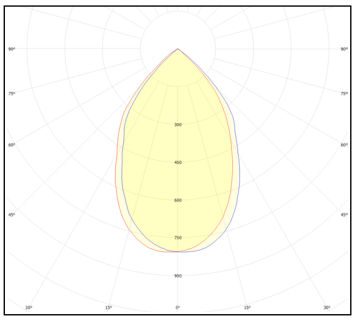

cd/klm
c0/c180
c90/270

n= 92%

70 degrees

Rithmeesterpark 21 | 4838 GZ Breda | The Netherlands
+31 (0) 76 520 5566 | info@internova.nl

© 2025 INTERNOVA PROFESSIONAL LIGHTING BV