INTERNOVA
PROFESSIONAL LIGHTING

PRODUCT DATASHEET




ELEGANTE SURFACE • BLACK

ELEGANTE SURFACE
SURFACE MOUNTED LIGHTING

made in HOLLAND

AVAILABLE IN




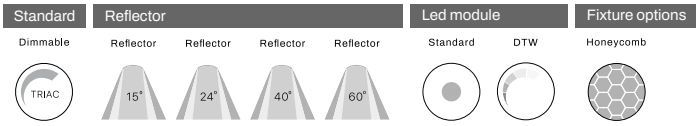

Lumen output	400lm
CRI	>90Ra
CCT	2700K • 3000K

FIXTURE SPECIFICATIONS

View product on website



Fixture weight: 213 grams

Housing material	Die cast aluminium
Material finish	Powder coating
RAL colour	9005 (Black) • 9016 (White) • 1036 (Gold)
Fixture type	Surface mounted Light
LED Module	Bridgelux V6 LED
Driver	Triac dimmable driver
Number of light sources	1
Adjustability	350° rotatable and 90° tiltable
IP rating	IP20
Expected lifetime	L90 / B10 @ 70.000 hours
Photobiological safety	RG1 Unlimited
Power factor	> 0.9
Colour consistency	3 SDCM
Warranty	3 years on LED module and driver

© 2025 INTERNOVA PROFESSIONAL LIGHTING BV

INTERNOVA
PROFESSIONAL LIGHTING

PRODUCT DATASHEET

FIXTURE VARIATIONS

LED module	Lumen	Light colour	Efficiency (Lm/W)	Power	Dim options
Bridgelux V6 LED	400lm	927	67	6.0W	Triac / DALI / Casambi
Bridgelux V6 LED	400lm	930	67	6.0W	Triac / DALI / Casambi
Bridgelux V6 LED	400lm	Dim to Warm 1800K - 3000K	67	6.0W	Triac / DALI / Casambi

Fixture variations:
[1]) Lumen output of LED module (COB) is displayed as net lumen and is subject to 10% tolerance of real time light output (set by international standards)
[2]) Colour temperature notation is composed of CRI value, indicated by the first digit, and CCT in Kelvin, indicated by the following 2 digits. Accuracy of the Correlated Colour Temperature (CCT) is subject to a tolerence of up to +/- 150 Kelvin compared to nominal value.
[3]) Fixture efficiency is displayed in lumens per watt and is calculated based on the gross lumen output and power consumption of both the LED module and driver
[4]) Mentioned wattage applies for the total power consumption of the fixture, including both LED module and driver.

Technical data can be changed by Internova Professional Lighting without prior notice.

ARTICLE CODE CONFIGURATOR

IN 87SF [ ] [ ] [ ] [ ]

Clear filters

LUMEN OUTPUT
- 400lm

LIGHT COLOUR
- 2700K
- 3000K
- Dim to Warm

REFLECTOR
- 15°
- 40°
- 24°
- 60°

FIXTURE COLOUR
- Black
- Black / Gold
- Black / White
- White
- White / Gold
- White / Black
- Champagne gold

DIM OPTIONS

STANDARD
- Triac dim


OPTIONS
- No option
- Honeycomb

Article code configurator:
[1]) This configurator may not be compatible with all PDF readers. For an optimal experience, please open this document using Google Chrome


Rithmeesterpark 21 | 4838 GZ Breda | The Netherlands
+31 (0) 76 520 5566 | info@internova.nl

© 2025 INTERNOVA PROFESSIONAL LIGHTING BV


POLAR DIAGRAMS

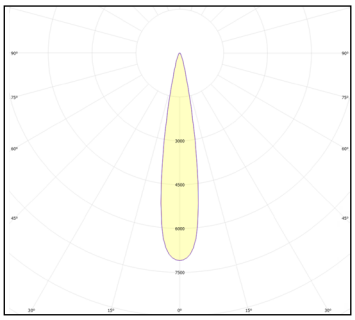


cd/klm
c0/c180
c90/270
n= 92%
15 degrees

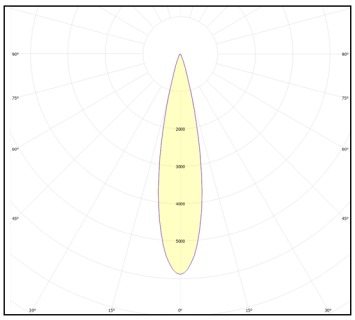

cd/klm
c0/c180
c90/270
n= 92%
24 degrees

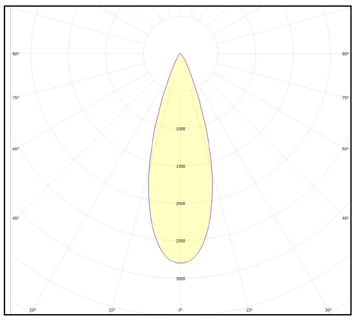

cd/klm
c0/c180
c90/270
n= 92%
40 degrees

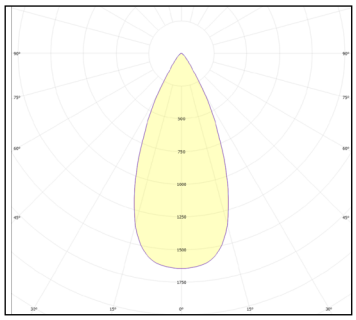

cd/klm
c0/c180
c90/270
n= 92%
60 degrees

Rithmeesterpark 21 | 4838 GZ Breda | The Netherlands
+31 (0) 76 520 5566 | info@internova.nl

© 2025 INTERNOVA PROFESSIONAL LIGHTING BV